


UP8601B-0166G

Digital Redundant Open Frame Power Supply



AC/DC 860W Digital Redundant Open Frame Power Supply

- ▶ Universal Input 90 to 264 VAC
- ▶ PMBus Support
- ▶ EMC Meets FCC / ICES-003, CISPR 32, EN55032 Class A, EN55035
- ▶ Active Power Factor Correction for EN61000-3-2 Class A
- ▶ Safety standard to meet: UL / CUL 62368-1, CB
- ▶ RoHS Compliant
- ▶ 80Plus Gold compliance

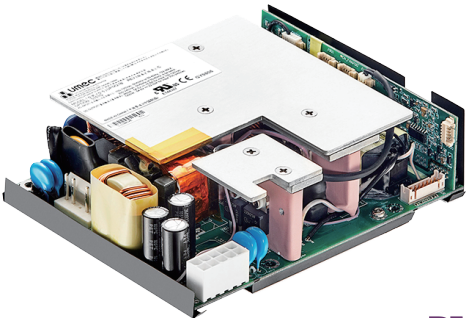

Input Specifications		
Input Voltage		90 - 264VAC
Frequency		47 - 63 Hz
Inrush Current		55A peak
General Specifications		
Hold-up Time		12mS (100% Loading)
Leakage Current		1.6 mA
Hi-pot Isolation		UL62368-1
Operating Temperature		0 °C to +50 °C
Storage Temperature		-40°C to +70°C
Humidity	Operating Humidity	5% to 90% relative humidity (non-condensing)
	Non-Operating Humidity	5% to 95% relative humidity (non-condensing)
Cooling		FAN Cooling (use 2 Fan), air flow direction see diagram
PMBus Support		PMBus 1.2 & SMBus 2.0 Revision
IPMI Support		Platform Management FRU Information V1.0 Revision

Output Specifications			
Output Power		860 Watt (max.)	
Total Regulation		±3 %	
Ripple & Noise		540 mVp-p	
Temperature Coefficient		±5 °C	
Short Circuit Protection		Latch mode	
Physical Specifications			
Dimension		L134mm x W110mm x H40.2mm	
Weight		610g±10%	
Models			
Model Number	Single Output Voltage (V.DC)	Output Current (A max.)	Ripple & Noise
UP8601B-0166G	54.5V	15.8A	540 mVp-p
Safety standard	CE, UL/CUL, CB, FCC		
Safety to meet	UL62368-1/CSA 62368-1, IEC60950-1, IEC62368-1, CE - Low Voltage Directive 2014/35/EU (Europe), GB4943 - CNCA Certification (China)		

